



Winkel G Coude G Elbow G

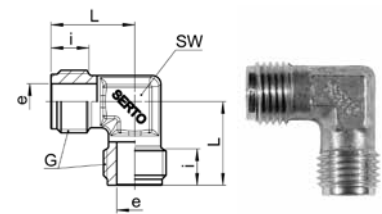

SO 02000

Type -G	Mat.-Nr.	bar	SW	L	i	e	kg/100
G=Rohrgewinde (zylindrisch)	G=Filetage-gaz BSP (cylindrique)		G=BSP thread (parallel)				
SO 02000-1/8-1/8	246.2000.060	125	10	19.0	8.5	4.0	1.620
SO 02000-1/4-1/4	246.2000.080	125	11	21.0	8.5	6.0	2.520
SO 02000-3/8-3/8	246.2000.100	100	14	22.0	9.5	8.5	3.740
SO 02000-1/2-1/2 (8+10+12)	246.2000.120	64	17	26.5	9.5	10.0	6.730
SO 02000-1/2-1/2 (14+15)	246.2000.140	64	19	28.0	12.5	12.0	6.640
SO 02000-3/4-3/4	246.2000.170	64	22	30.0	12.5	15.0	11.580

Winkel G-R Coude G-R Elbow G-R

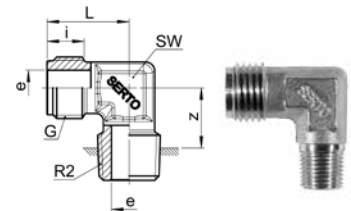

SO 02400

Type -G -R2	Mat.-Nr.	bar	SW	L	i	z	e	kg/100
G=Rohrgewinde (zylindrisch)	G=Filetage-gaz BSP (cylindrique)			G=BSP thread (parallel)				
R2=Rohrgewinde (kegelig)	R2=Filetage-gaz BSP (conique)			R2=BSP thread (tapered)				
SO 02400-1/8 z-1/8 k	246.2401.100	125	10	19.0	8.5	13.5	4.0	1.700
SO 02400-1/8 z-1/4 k	246.2401.110	125	11	21.0	8.5	15.0	4.0	2.600
SO 02400-1/4 z-1/8 k	246.2401.160	125	11	21.0	8.5	13.5	5.0	2.300
SO 02400-1/4 z-1/4 k	246.2401.170	125	11	21.0	8.5	15.0	6.0	2.800
SO 02400-1/4 z-3/8 k	246.2401.180	125	14	22.0	8.5	16.0	6.0	4.200
SO 02400-3/8 z-1/4 k	246.2401.270	100	14	22.0	9.5	15.0	8.5	3.700
SO 02400-3/8 z-3/8 k	246.2401.280	100	14	22.0	9.5	16.0	8.5	4.300
SO 02400-3/8 z-1/2 k	246.2401.285	100	19	28.0	10.0	19.0	8.0	6.700
SO 02400-1/2 z-1/4 k	246.2401.380	64	17	25.0	11.5	16.0	7.0	5.900
SO 02400-1/2 z-3/8 k	246.2401.390	64	17	25.0	11.5	16.0	10.0	5.900
SO 02400-1/2 z-1/2 k	246.2401.504	64	19	28.0	13.0	19.0	12.0	7.900
SO 02400-1/2 z-3/4 k	246.2401.506	64	22	30.0	13.0	20.0	12.0	8.300
SO 02400-3/4 z-1/2 k	246.2401.596	64	22	30.0	12.0	19.0	14.0	10.600
SO 02400-3/4 z-3/4 k	246.2401.598	64	22	30.0	12.0	20.0	15.0	12.700