

# Durchgangverschraubung (Thermofühlerverschraubung)


mit PTFE-Klemmring

## Raccordement pour sondes

avec bague de serrage en PTFE

## Temperature probe union

with PTFE compression ferrule

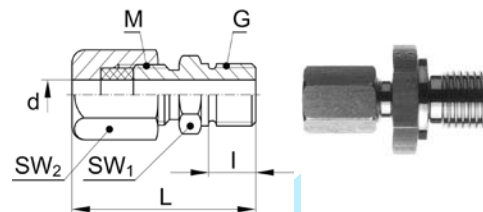

### SO 51194-D-PTFE

Typ -d-G	Mat.-Nr.	M	SW1	SW2	L	l1	kg/100
G=Rohrgewinde (zylindrisch)		G=Filetage-gaz BSP (cylindrique)		G=BSP thread (straight)			
SO 51194-1-1/4	058.1165.002	6 x 0.75	19	8	30.0	12.0	2.640
SO 51194-1-1/2	058.1165.004	6 x 0.75	27	8	33.0	12.0	6.320
SO 51194-1,5-1/4	058.1165.011	6 x 0.75	19	8	30.0	12.0	2.640
SO 51194-1,5-1/2	058.1165.013	6 x 0.75	27	8	33.0	12.0	6.340
SO 51194-2-1/8	058.1165.020	6 x 0.75	14	8	24.0	8.0	1.260
SO 51194-2-1/4	058.1165.021	6 x 0.75	19	8	30.0	12.0	2.630
SO 51194-2-1/2	058.1165.023	6 x 0.75	27	8	33.0	12.0	6.310
SO 51194-2.5-1/8	058.1165.030	6 x 0.75	14	8	24.0	8.0	1.250
SO 51194-2.5-1/4	058.1165.031	6 x 0.75	19	8	30.0	12.0	2.620
SO 51194-2.5-1/2	058.1165.033	6 x 0.75	27	8	33.0	12.0	6.290
SO 51194-3-1/8	058.1165.040	6 x 0.75	14	8	24.0	8.0	1.370
SO 51194-3-1/4	058.1165.042	6 x 0.75	19	8	30.0	12.0	1.250
SO 51194-3-1/2	058.1165.044	6 x 0.75	27	8	33.0	12.0	2.610
SO 51194-3.5-1/8	058.1165.047	8 x 1	14	10	30.0	8.0	6.280
SO 51194-3.5-1/4	058.1165.049	8 x 1	19	10	35.0	12.0	1.250
SO 51194-4-1/8	058.1165.060	8 x 1	14	10	30.0	8.0	1.680
SO 51194-4-1/4	058.1165.065	8 x 1	19	10	35.0	12.0	2.880
SO 51194-4-1/2	058.1165.070	8 x 1	27	10	38.0	12.0	6.680
SO 51194-4.5-1/8	058.1165.076	8 x 1	14	10	30.0	8.0	1.680
SO 51194-4.5-1/4	058.1165.077	8 x 1	19	10	36.0	12.0	2.940
SO 51194-5-1/8	058.1165.082	10 x 1	14	12	31.0	8.0	1.990
SO 51194-5-1/4	058.1165.084	10 x 1	19	12	36.0	12.0	3.220
SO 51194-5-1/2	058.1165.088	10 x 1	27	12	39.0	12.0	7.030
SO 51194-5-3/4	058.1165.089	10 x 1	32	12	44.0	16.0	14.190
SO 51194-6-1/4	058.1165.110	10 x 1	19	12	36.0	12.0	2.790
SO 51194-6-1/2	058.1165.125	10 x 1	27	12	39.0	12.0	6.880
SO 51194-6-3/4	058.1165.126	10 x 1	32	12	44.0	16.0	13.900
SO 51194-8-1/4	058.1165.170	14 x 1	19	17	38.0	12.0	4.080
SO 51194-8-3/8	058.1165.180	14 x 1	22	17	39.0	12.0	5.310
SO 51194-8-1/2	058.1165.185	14 x 1	27	17	39.0	12.0	7.010
SO 51194-8-3/4	058.1165.190	14 x 1	32	17	44.0	16.0	10.790
SO 51194-9-1/2	058.1165.210	14 x 1	27	17	39.0	12.0	6.830
SO 51194-9-3/4	058.1165.214	14 x 1	32	17	44.0	16.0	10.610
SO 51194-10-3/8	058.1165.280	14 x 1	22	17	39.0	12.0	5.030
SO 51194-10-1/2	058.1165.285	14 x 1	27	17	39.0	12.0	6.610
SO 51194-10-3/4	058.1165.290	14 x 1	32	17	44.0	16.0	10.340

Werkstoff: 1.4571 Klemmring aus PTFE

**Temperatur/Druck bis +250 °C und  
6 bar**

Matériau: 1.4571 bague de serrage en PTFE

**Température/Pression jusqu'au  
+250 °C et 6 bar.**

Material: 1.4571 compression ferrule of PTFE

**Temperature/Pressure up to +250 °C  
and 6 bar.**