



Übergangsmuffe Adaptateur femelle Female adaptor

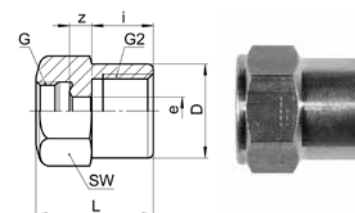

SO 00030

Type -G -G2	Mat.-Nr.	bar	SW	L	D	i	z	e	kg/100
G=Rohrgewinde (zylindrisch)	G=Filetage-gaz BSP (cylindrique)		G=BSP thread (parallel)						
G2=Rohrgewinde (zylindrisch)	G2=Filetage-gaz BSP (cylindrique)		G2=BSP thread (parallel)						
SO 00030-1/8-1/8	246.0301.042	125	14	22.0	14.0	10.0	4.5	4.0	1.820
SO 00030-1/8-1/4	246.0301.044	125	19	23.5	19.0	11.0	5.0	4.0	4.100
SO 00030-1/8-3/8	246.0301.046	125	22	25.0	22.0	12.0	5.5	4.0	8.000
SO 00030-1/8-1/2	246.0301.048	125	27	27.5	27.0	14.0	6.0	4.0	9.470
SO 00030-1/4-1/8	246.0301.102	125	17	22.5	15.0	10.0	4.5	6.0	2.440
SO 00030-1/4-1/4	246.0301.104	125	19	24.0	19.0	11.0	5.0	6.0	2.760
SO 00030-1/4-3/8	246.0301.106	125	22	25.5	22.0	12.0	5.5	6.0	5.370
SO 00030-1/4-1/2	246.0301.108	125	27	28.0	27.0	14.0	6.0	6.0	9.190
SO 00030-3/8-1/4	246.0301.164	100	22	24.5	20.0	11.0	5.0	8.0	4.710
SO 00030-3/8-3/8	246.0301.166	100	24	26.0	24.0	12.0	5.5	8.0	6.410
SO 00030-3/8-1/2	246.0301.168	100	30	28.5	30.0	14.0	6.0	8.0	12.040
SO 00030-1/2-1/4	246.0301.224	100	27	26.5	20.0	11.0	5.0	8.5	6.670
SO 00030-1/2-3/8	246.0301.226	100	27	28.0	25.0	12.0	5.5	10.0	8.000
SO 00030-1/2-1/2	246.0301.228	100	30	30.5	30.0	14.0	6.0	12.0	9.310
SO 00030-1/2-3/4	246.0301.232	100	32	34.0	32.0	17.0	6.5	12.0	11.120

Übergangsmuffe NPT Adaptateur femelle NPT Female adaptor NPT

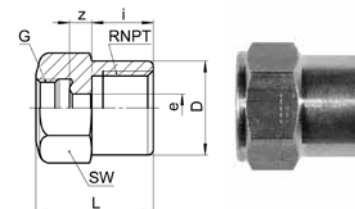

SO 00030 NPT

Type -G -RNPT	Mat.-Nr.	bar	SW	L	D	i	z	e	kg/100
G=Rohrgewinde (zylindrisch)	G=Filetage-gaz BSP (cylindrique)		G=BSP thread (parallel)						
RNPT=NPT Gewinde	RNPT=Filetage NPT		RNPT=NPT thread						
SO 00030-1/8-1/8 NPT	246.0302.042	125	14	22.0	14.0	10.0	4.5	4.0	1.850
SO 00030-1/8-1/4 NPT	246.0302.044	125	19	26.5	19.0	14.0	5.0	4.0	4.560
SO 00030-1/4-1/8 NPT	246.0302.102	125	17	22.5	15.0	10.0	4.5	6.0	4.100
SO 00030-1/4-1/4 NPT	246.0302.104	125	19	27.0	19.0	14.0	5.0	6.0	3.760
SO 00030-3/8-1/4 NPT	246.0302.164	100	22	27.5	20.0	14.0	5.0	8.0	4.710
SO 00030-3/8-3/8 NPT	246.0302.166	100	22	27.5	22.0	14.0	5.0	8.0	5.030
SO 00030-1/2-3/8 NPT	246.0302.226	100	27	30.0	24.0	14.0	5.5	10.0	8.650
SO 00030-1/2-1/2 NPT	246.0302.228	100	30	34.0	30.0	18.0	5.5	12.0	12.860

Fortsetzung nächste Seite

Suite à la prochaine page

Continued on next page