

Gerade Schottverschraubung reduziert

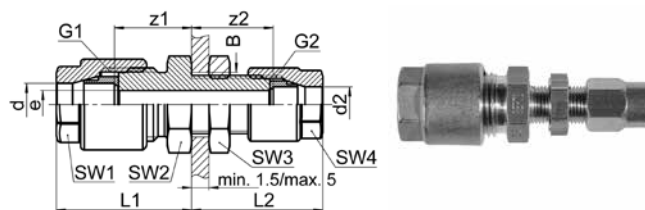
Durchführungslänge max. 5 mm

Union double réduite traversée de cloison

pour cloison max. 5 mm

Panel mount reduction union

max. panel thickness 5 mm

SO 01528 RED


Type -d -d2	Mat.-Nr.	bar	G1	G2	SW1	SW2	SW3	SW4	L1	L2	B	z1	z2	e	kg/100
Für metrische Rohre	Pour tubes métriques		For metric tubes												
SO 01528-6-4	248.1504.110	125	1/8	1/8	12	14	14	12	24.0	27.5	10.5	16.5	21.0	3.4	4.150
SO 01528-8-6	248.1504.140	125	1/4	1/8	14	14	14	12	26.5	29.0	10.5	17.0	21.0	4.0	5.750
SO 01528-10-6	248.1504.175	100	3/8	1/8	17	17	14	12	30.5	29.0	10.5	18.5	21.0	4.0	8.420
SO 01528-10-8	248.1504.190	100	3/8	1/4	17	19	19	14	30.5	32.5	14.0	18.5	23.0	6.0	10.760
SO 01528-12-10	248.1504.240	100	1/2	3/8	19	24	24	17	35.5	35.5	17.0	22.0	23.5	8.0	18.700
SO 01528-14-10	248.1504.320	64	1/2	3/8	22	24	24	17	38.5	36.0	17.0	22.5	23.5	8.0	19.360
SO 01528-14-12	248.1504.340	64	1/2	1/2	22	30	30	19	38.5	51.5	21.5	22.5	38.0	11.0	26.960
SO 01528-15-10	248.1504.410	64	1/2	3/8	22	24	24	17	38.5	35.5	17.0	22.5	23.5	8.0	19.050
SO 01528-15-12	248.1504.420	64	1/2	1/2	22	30	30	19	38.5	51.5	21.5	22.5	38.0	11.0	26.650

Für Zollrohre	Pour tubes pouces		For inch tubes												
SO 01528-6,35-4	248.1504.123	125	1/8	1/8	12	14	14	12	24.0	27.5	10.5	16.5	21.0	3.4	4.120
SO 01528-8-6,35	248.1504.141	125	1/4	1/8	14	14	14	12	26.5	29.0	10.5	17.0	21.0	4.0	5.710
SO 01528-9,52-8	248.1504.162	100	3/8	1/4	17	19	19	14	30.5	32.5	14.0	18.5	23.0	6.0	10.800
SO 01528-12-9,52	248.1504.236	100	1/2	3/8	19	24	24	17	35.5	35.5	17.0	22.0	23.5	8.0	18.740
SO 01528-12,7-9,52	248.1504.270	100	1/2	3/8	22	24	24	17	36.5	35.5	17.0	22.0	23.5	8.0	19.370
SO 01528-12,7-10	248.1504.272	100	1/2	3/8	22	24	24	17	36.5	35.5	17.0	22.0	23.5	8.0	19.330

Umrechnung für "d" bei Zollrohren:

6,35 = 1/4

9,52 = 3/8

12,7 = 1/2

Conversion de "d" pour tubes en pouces:

6,35 = 1/4

9,52 = 3/8

12,7 = 1/2

Conversion for "d" for inch tubes:

6,35 = 1/4

9,52 = 3/8

12,7 = 1/2

Sechskantmutter siehe SO 40006

Ecroû à six pans voir SO 40006

Hexagon nut see SO 40006