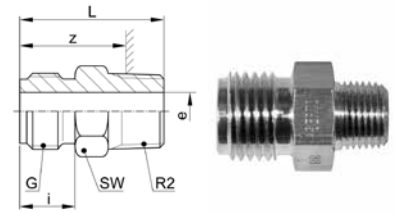


## Doppelnippel G-R

### Mamelon double G-R

#### Male threaded adaptor G-R


**SO 01100**

| Type -G -R2                 | Mat.-Nr.                         | bar | SW                      | L    | i    | z    | e    | kg/100 |
|-----------------------------|----------------------------------|-----|-------------------------|------|------|------|------|--------|
| G=Rohrgewinde (zylindrisch) | G=Filetage-gaz BSP (cylindrique) |     | G=BSP thread (parallel) |      |      |      |      |        |
| R2=Rohrgewinde (kegelig)    | R2=Filetage-gaz BSP (conique)    |     | R2=BSP thread (tapered) |      |      |      |      |        |
| SO 01100-1/8 z-1/8 k        | 246.1101.100                     | 125 | 10                      | 22.0 | 10.0 | 18.0 | 4.0  | 1.310  |
| SO 01100-1/8 z-1/4 k        | 246.1101.110                     | 125 | 14                      | 28.0 | 10.0 | 22.0 | 4.0  | 2.010  |
| SO 01100-1/8 z-3/8 k        | 246.1101.120                     | 125 | 17                      | 28.0 | 10.0 | 21.6 | 4.0  | 2.810  |
| SO 01100-1/4 z-1/8 k        | 246.1101.160                     | 125 | 14                      | 25.0 | 11.0 | 21.0 | 5.0  | 2.010  |
| SO 01100-1/4 z-1/4 k        | 246.1101.170                     | 125 | 14                      | 29.0 | 11.0 | 23.0 | 6.5  | 2.410  |
| SO 01100-1/4 z-3/8 k        | 246.1101.180                     | 125 | 17                      | 29.0 | 11.0 | 22.6 | 6.5  | 3.210  |
| SO 01100-1/4 z-1/2 k        | 246.1101.185                     | 125 | 22                      | 34.0 | 11.0 | 25.8 | 6.5  | 4.910  |
| SO 01100-3/8 z-1/4 k        | 246.1101.270                     | 100 | 17                      | 29.5 | 11.5 | 23.5 | 8.5  | 2.970  |
| SO 01100-3/8 z-3/8 k        | 246.1101.280                     | 100 | 17                      | 29.5 | 11.5 | 23.1 | 8.5  | 3.570  |
| SO 01100-3/8 z-1/2 k        | 246.1101.285                     | 100 | 22                      | 34.5 | 11.5 | 26.3 | 8.5  | 5.270  |
| SO 01100-1/2 z-1/4 k        | 246.1101.380                     | 64  | 22                      | 33.0 | 14.0 | 27.0 | 8.0  | 5.970  |
| SO 01100-1/2 z-3/8 k        | 246.1101.390                     | 64  | 22                      | 33.0 | 14.0 | 26.6 | 10.0 | 5.770  |
| SO 01100-1/2 z-1/2 k        | 246.1101.504                     | 64  | 22                      | 37.0 | 14.0 | 28.8 | 12.0 | 6.260  |
| SO 01100-1/2 z-3/4 k        | 246.1101.506                     | 64  | 27                      | 39.0 | 14.0 | 29.5 | 12.0 | 8.860  |
| SO 01100-3/4 z-1/2 k        | 246.1101.596                     | 64  | 27                      | 40.0 | 15.0 | 31.8 | 14.0 | 9.190  |
| SO 01100-3/4 z-3/4 k        | 246.1101.598                     | 64  | 27                      | 40.0 | 15.0 | 30.5 | 15.0 | 10.190 |

## Doppelnippel G-G


mit Dichtkante

### Mamelon double G-G

avec arête d'étanchéité

#### Male threaded adaptor G-G

with edge seal

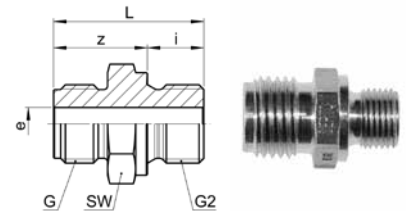
**SO 01104**

| Type -G -G2                  | Mat.-Nr.                          | bar | SW                       | L    | i    | z    | e    | kg/100 |
|------------------------------|-----------------------------------|-----|--------------------------|------|------|------|------|--------|
| G=Rohrgewinde (zylindrisch)  | G=Filetage-gaz BSP (cylindrique)  |     | G=BSP thread (parallel)  |      |      |      |      |        |
| G2=Rohrgewinde (zylindrisch) | G2=Filetage-gaz BSP (cylindrique) |     | G2=BSP thread (parallel) |      |      |      |      |        |
| SO 01104-1/8-1/8             | 246.1141.100                      | 125 | 14                       | 23.5 | 8.0  | 15.5 | 4.0  | 1.410  |
| SO 01104-1/8-1/4             | 246.1141.110                      | 125 | 19                       | 29.0 | 12.0 | 17.0 | 4.0  | 3.010  |
| SO 01104-1/4-1/8             | 246.1141.160                      | 125 | 14                       | 24.5 | 8.0  | 16.5 | 5.0  | 1.710  |
| SO 01104-1/4-1/4             | 246.1141.170                      | 125 | 19                       | 30.0 | 12.0 | 18.0 | 6.0  | 3.110  |
| SO 01104-1/4-3/8             | 246.1141.180                      | 125 | 22                       | 31.5 | 12.0 | 19.5 | 6.0  | 4.010  |
| SO 01104-3/8-1/4             | 246.1141.270                      | 100 | 19                       | 30.5 | 12.0 | 18.5 | 7.0  | 3.570  |
| SO 01104-3/8-3/8             | 246.1141.280                      | 100 | 22                       | 32.0 | 12.0 | 20.0 | 7.0  | 5.470  |
| SO 01104-1/2-1/4             | 246.1141.380                      | 64  | 22                       | 34.5 | 12.0 | 22.5 | 7.0  | 6.600  |
| SO 01104-1/2-3/8             | 246.1141.390                      | 64  | 22                       | 34.5 | 12.0 | 22.5 | 9.0  | 6.270  |
| SO 01104-1/2-1/2             | 246.1141.504                      | 64  | 27                       | 38.0 | 14.0 | 24.0 | 12.0 | 9.490  |