


Übergangsnippel G-G

Adaptateur mâle G - femelle G

Adaptor male G - female G

SO 01200

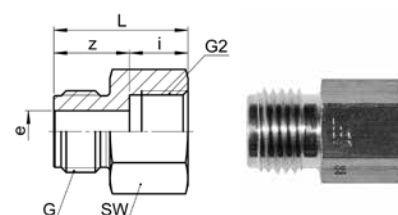


Type -G-G2	Mat.-Nr.	bar	SW	L	i	z	e	kg/100
G=Rohrgewinde (zylindrisch)	G=Filetage-gaz BSP (cylindrique)			G=BSP thread (parallel)				
G2=Rohrgewinde (zylindrisch)	G2=Filetage-gaz BSP (cylindrique)			G2=BSP thread (parallel)				
SO 01200-1/8α-1/8i	246.1201.100	125	14	23.0	10.0	13.0	4.5	1.610
SO 01200-1/8α-1/4i	246.1201.110	125	17	25.0	11.0	14.0	4.5	2.310
SO 01200-1/8α-3/8i	246.1201.120	125	22	26.0	12.0	14.0	4.5	4.010
SO 01200-1/4α-1/8i	246.1201.160	125	14	24.0	10.0	14.0	6.5	2.010
SO 01200-1/4α-1/4i	246.1201.170	125	17	26.0	11.0	15.0	6.5	2.610
SO 01200-1/4α-3/8i	246.1201.180	125	22	27.0	12.0	15.0	6.5	4.010
SO 01200-1/4α-1/2i	246.1201.185	125	27	29.0	14.0	15.0	6.5	6.710
SO 01200-3/8α-1/4i	246.1201.270	100	17	26.5	11.0	15.5	8.5	2.970
SO 01200-3/8α-3/8i	246.1201.280	100	22	27.5	12.0	15.5	8.5	4.370
SO 01200-3/8α-1/2i	246.1201.285	100	27	30.0	14.0	16.0	8.5	6.970
SO 01200-3/8α-3/4i	246.1201.290	100	32	33.0	17.0	16.0	8.5	9.970
SO 01200-1/2α-3/8i	246.1201.390	64	22	30.0	12.0	18.0	10.5	5.370
SO 01200-1/2α-1/2i	246.1201.504	64	27	32.5	14.0	18.5	12.5	7.860
SO 01200-1/2α-3/4i	246.1201.506	64	32	35.5	17.0	18.5	12.5	11.060
SO 01200-3/4α-1/2i	246.1201.596	64	27	35.5	14.0	19.5	14.5	11.060
SO 01200-3/4α-3/4i	246.1201.598	64	32	36.5	17.0	19.5	15.5	11.060

Schott-Doppelnippel

Mamelon double traversée de cloison

Panel mount male threaded adaptor

SO 01500

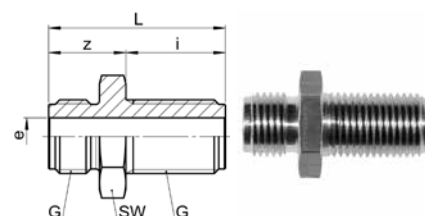


Type -G	Mat.-Nr.	bar	SW	L	i	z	e	kg/100
G=Rohrgewinde (zylindrisch)	G=Filetage-gaz BSP (cylindrique)			G=BSP thread (parallel)				
SO 01500-1/8-1/8	246.1500.060	125	14	35.0	20.0	15.0	4.0	1.900
SO 01500-1/4-1/4	246.1500.080	125	19	38.0	22.0	16.0	6.5	3.400
SO 01500-3/8-3/8	246.1500.100	100	24	40.0	22.5	17.5	8.5	6.100
SO 01500-1/2-1/2	246.1500.120	100	30	47.0	26.0	21.0	12.0	11.900

Schott-Doppelnippel lang

Mamelon double traversée de cloison long

Panel mount male threaded adaptor long

SO 01504

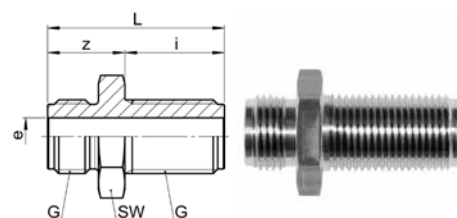

Type -G	Mat.-Nr.	bar	SW	L	i	z	e	kg/100
G=Rohrgewinde (zylindrisch)	G=Filetage-gaz BSP (cylindrique)			G=BSP thread (parallel)				
SO 01504-1/2-1/2	246.1540.140	100	30	58.0	37.0	21.0	12.0	11.800