

Winkelschottverschraubung

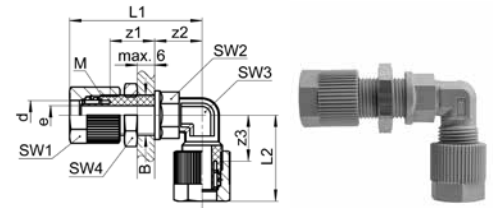
Durchführungslänge max. 6 mm

Coude traversée de cloison

pour cloison max. 6 mm

Panel mount elbow union

max. panel thickness 6 mm

SO 32721


Type -d	Mat.-Nr.	bar +	M	SW1	SW2	SW3	SW4	L1	L2	B	z1	z2	z3	e	kg/100
SO 32721-6	168.2700.060	10	10x1.0	12	10	8	14	39.5	25.0	10.5	15.5	13.0	14.0	2.8	1.234
SO 32721-8	168.2700.080	10	12x1.0	14	12	10	17	43.0	27.5	12.5	15.0	15.0	14.5	4.8	1.040
SO 32721-10	168.2700.100	10	14x1.0	17	14	12	19	46.0	30.0	14.5	15.5	16.5	16.0	6.6	1.490
SO 32721-12	168.2700.120	10	16x1.0	19	17	13	19	48.5	33.5	16.5	13.5	17.5	16.0	8.0	2.000

Sechskantmutter SO 40006 (Messing)

Ecrou à six pans SO 40006 (laiton)

Hexagon nut SO 40006 (brass)

d=Rohraussen- \varnothing / mit Wandung 1 mm
Ad=Aussen- \varnothing der Andrehung
e=kleinste Bohrung
L=Mass in montiertem Zustand

d= \varnothing extérieur du tube / avec paroi de 1 mm
Ad= \varnothing extérieur de la portée cylindrique
e= \varnothing -min. de passage
L=après montage

d=tube outside diameter / with wall thickness 1 mm
Ad=outside diameter of cyl. stub
e=minimum bore
L=installed length