

Stecker mit Innengewinde


nicht absperrend

Embout avec taraudage

non-obturant

Nipple with female thread

no shut-off

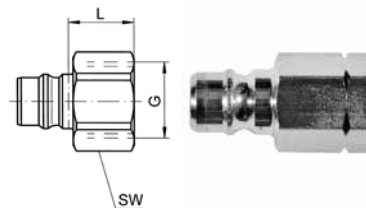

S-PHN

Type -G	Mat.-Nr.	bar	SW	L	kg/100
G=Rohrgewinde (zylindrisch)	G=Filetage-gaz BSP (cylindrique)			G=BSP thread (parallel)	
S-PHN4-G 1/4 i	YBD.OH53.1040	690	16	18.5	2.100
S-PHN6-G 3/8 i	YBD.OH53.1060	555	20	20.3	3.500
S-PHN8-G 1/2 i	YBD.OH53.1080	555	25	25.4	7.100
S-PHN12-G 3/4 i	YBD.OH53.1090	485	30	26.1	9.300
S-PHN16-G1 i	YBD.OH53.1100	280	38	30.2	16.500
S-PHN20-G1 1/4 i	YBD.OH53.1140	210	47	33.0	28.000
S-PHN24-G1 1/2 i	YBD.OH53.1180	210	54	34.3	40.500

Stecker mit Innengewinde


absperrend

Embout avec taraudage

obturant

Nipple with female thread

shut-off

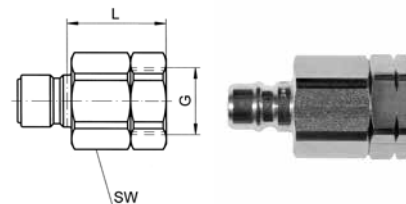

S-VHN

Type -G	Mat.-Nr.	bar	SW	L	kg/100
G=Rohrgewinde (zylindrisch)	G=Filetage-gaz BSP (cylindrique)			G=BSP thread (parallel)	
S-VHN4-G 1/4 i-FKM	YBD.OH54.1042	345	22	25.4	6.900
S-VHN6-G 3/8 i-FKM	YBD.OH54.1062	280	25	28.4	8.900
S-VHN8-G 1/2 i-FKM	YBD.OH54.1082	260	30	32.0	13.700
S-VHN12-G 3/4 i-FKM	YBD.OH54.1092	140	38	35.6	23.200
S-VHN16-G1 i-FKM	YBD.OH54.1102	140	47	41.7	32.000
S-VHN20-G1 1/4 i-FKM	YBD.OH54.1142	105	50	63.2	50.000