


# T-Verschraubung reduziert

## Té réduit

### Tee reduction union

#### SO 03021 RED


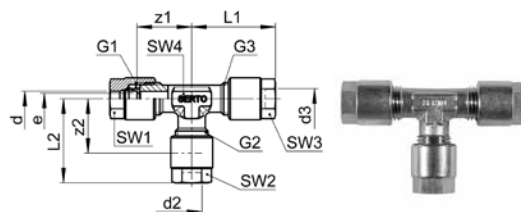


Type -d -d2 -d3	Mat.-Nr.	bar	G1	G2	G3	SW1	SW2	SW3	SW4	L1	L2	z1	z2	e	Vers.	kg/100
SO 03021-6-8-6	248.3004.058	125	1/4	1/4	1/4	14	14	14	11	31.0	32.0	22.0	22.0	4.5	V0	9.610
SO 03021-6-10-6	248.3004.062	100	3/8	3/8	3/8	17	17	17	14	34.0	35.0	23.0	23.0	5.0	V0	12.540
SO 03021-6-10-10	248.3004.158	100	1/4	3/8	3/8	14	17	17	14	32.0	35.0	23.0	23.0	4.5	V1	13.960
SO 03021-8-6-6	248.3004.091	125	1/4	1/4	1/4	14	14	14	11	32.0	31.0	22.0	22.0	4.5	V0	9.610
SO 03021-8-6-8	248.3004.093	125	1/4	1/4	1/4	14	14	14	11	32.0	31.0	22.0	22.0	4.5	V0	9.610
SO 03021-8-8-6	248.3004.100	125	1/4	1/4	1/4	14	14	14	11	32.0	32.0	22.0	22.0	4.5	V0	9.610
SO 03021-8-8-10	248.3004.151	100	3/8	3/8	3/8	17	17	17	14	35.0	35.0	23.0	23.0	7.0	V0	12.600
SO 03021-8-8-12	248.3004.206	100	1/2	1/2	1/2	19	19	19	19	37.5	37.5	26.0	26.0	7.0	V0	20.400
SO 03021-8-10-8	248.3004.104	100	3/8	3/8	3/8	17	17	17	14	33.0	35.0	23.0	23.0	6.5	V0	12.540
SO 03021-8-10-10	248.3004.161	100	1/4	3/8	3/8	14	17	17	14	35.0	35.0	23.0	23.0	7.0	V1	13.950
SO 03021-8-12-8	248.3004.107	100	1/2	1/2	1/2	19	19	19	19	37.5	39.5	26.0	26.0	7.0	V0	21.120
SO 03021-8-12-12	248.3004.229	100	1/2	1/2	1/2	19	19	19	19	37.5	39.5	26.0	26.0	7.0	V0	23.760
SO 03021-8-14-14	248.3004.356	64	1/2	1/2	1/2	19	22	22	19	37.5	42.5	26.0	26.0	7.0	V0	25.080
SO 03021-8-15-15	248.3004.430	64	1/2	1/2	1/2	19	22	22	19	37.5	42.5	26.0	26.0	7.0	V0	24.460
SO 03021-10-6-10	248.3004.147	100	3/8	1/4	3/8	17	14	17	14	35.0	32.0	23.0	23.0	4.5	V2	13.850
SO 03021-10-8-10	248.3004.153	100	3/8	1/4	3/8	17	14	17	14	35.0	33.0	23.0	23.0	7.0	V2	13.850
SO 03021-10-10-12	248.3004.220	100	1/2	1/2	1/2	19	19	19	19	38.0	38.0	26.0	26.0	9.0	V0	22.290
SO 03021-10-10-15	248.3004.403	64	1/2	1/2	1/2	19	19	22	19	38.0	38.0	26.0	26.5	9.0	V0	22.650
SO 03021-10-12-10	248.3004.165	100	1/2	1/2	1/2	19	19	19	19	38.0	39.5	26.0	26.0	7.0	V0	20.930
SO 03021-10-12-12	248.3004.232	100	1/2	1/2	1/2	19	19	19	19	38.0	39.5	26.0	26.0	9.0	V0	23.660
SO 03021-10-12-14	248.3004.340	64	1/2	1/2	1/2	19	19	22	19	38.0	39.5	26.0	26.0	9.0	V0	24.320
SO 03021-10-12-15	248.3004.415	64	1/2	1/2	1/2	19	19	22	19	38.0	39.5	26.0	26.0	9.0	V0	24.010
SO 03021-10-14-12	248.3004.244	64	1/2	1/2	1/2	19	22	19	19	38.0	42.5	26.0	26.0	9.0	V0	24.320
SO 03021-10-15-10	248.3004.175	64	1/2	1/2	1/2	19	22	19	19	38.0	42.5	26.5	26.5	7.0	V0	21.280
SO 03021-10-15-12	248.3004.252	64	1/2	1/2	1/2	19	22	19	19	38.0	42.5	26.0	26.0	9.0	V0	24.010
SO 03021-10-15-15	248.3004.433	64	1/2	1/2	1/2	19	22	22	19	38.0	42.5	26.0	26.0	9.0	V0	24.360
SO 03021-12-6-12	248.3004.200	100	1/2	3/8	1/2	19	17	19	19	39.5	37.0	26.0	27.0	4.5	V2	24.970
SO 03021-12-8-12	248.3004.210	100	1/2	3/8	1/2	19	17	19	19	39.5	38.0	26.0	26.0	7.0	V2	24.920
SO 03021-12-10-12	248.3004.222	100	1/2	3/8	1/2	19	17	19	19	39.5	38.0	26.0	26.0	9.0	V2	24.830
SO 03021-12-14-12	248.3004.246	64	1/2	1/2	1/2	19	22	19	19	39.5	42.5	26.0	26.5	11.0	V0	28.410
SO 03021-12-15-12	248.3004.254	64	1/2	1/2	1/2	19	22	19	19	39.5	42.5	26.0	26.5	11.0	V0	28.100

#### Anwendungsbeispiele:

#### Exemples d'utilisation:

#### Sample combinations:



V0 = nicht reduziertes Grundteil

V0 = corps de raccord non réduit

V0 = not reduced union body

V1 - V2 = Versionen mit reduziertem Grundteil

V1 - V2 = versions avec corps de raccord réduit

V1 - V2 = versions with reduced union bodies


Fortsetzung nächste Seite

Suite à la prochaine page

Continued on next page

# **T-Verschraubung reduziert** **Té réduit** **Tee reduction union**

## **SO 03021 RED**

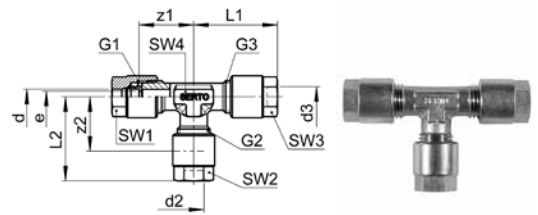



Type -d -d2 -d3	Mat.-Nr.	bar	G1	G2	G3	SW1	SW2	SW3	SW4	L1	L2	z1	z2	e	Vers.	kg/100
SO 03021-14-8-14	248.3004.320	64	1/2	3/8	1/2	22	17	22	19	42.5	38.0	26.5	26.0	7.0	V2	26.250
SO 03021-14-10-12	248.3004.330	64	1/2	3/8	1/2	22	17	19	19	42.5	38.0	26.5	26.0	9.0	V2	25.490
SO 03021-14-12-12	248.3004.342	64	1/2	1/2	1/2	22	19	19	19	42.5	39.5	26.5	26.5	11.0	V0	28.410
SO 03021-14-12-14	248.3004.346	64	1/2	1/2	1/2	22	19	22	19	42.5	39.5	26.0	26.5	11.0	V0	29.070
SO 03021-14-14-12	248.3004.361	64	1/2	1/2	1/2	22	22	19	19	42.5	42.5	26.5	26.5	11.0	V0	29.070
SO 03021-15-8-15	248.3004.393	64	1/2	3/8	1/2	22	17	22	19	42.5	38.0	26.5	26.0	7.0	V2	25.630
SO 03021-15-10-12	248.3004.405	64	1/2	3/8	1/2	22	17	19	19	42.5	38.0	26.5	26.0	9.0	V2	25.180
SO 03021-15-10-15	248.3004.410	64	1/2	3/8	1/2	22	17	22	19	42.5	38.0	26.5	26.0	9.0	V2	25.530
SO 03021-15-12-12	248.3004.417	64	1/2	1/2	1/2	22	19	19	19	42.5	39.5	26.5	26.5	11.0	V0	28.100
SO 03021-15-12-15	248.3004.422	64	1/2	1/2	1/2	22	19	22	19	42.5	39.5	26.0	26.5	11.0	V0	28.450
SO 03021-15-15-12	248.3004.435	64	1/2	1/2	1/2	22	22	19	19	42.5	42.5	26.5	26.5	11.0	V0	28.450

3

### **Anwendungsbeispiele:**

### **Exemples d'utilisation:**

### **Sample combinations:**



V0 = nicht reduziertes Grundteil

V1 - V2 = Versionen mit reduziertem Grundteil

V0 = corps de raccord non réduit

V1 - V2 = versions avec corps de raccord réduit

V0 = not reduced union body

V1 - V2 = versions with reduced union bodies